


EXTERNAL POWDERCOATED
ALUMINIUM POST CAP




BOUNDARYLINE (DAR4040)
BRACKET, POWDERCOATED
ALUMINIUM

PANEL RAIL

B
1:5

EXTERNAL POWDERCOATED
ALUMINIUM POST CAP




BOUNDARYLINE (DAR4040)
BRACKET, POWDERCOATED
ALUMINIUM

BRACKET FIXED TO RAIL
WITH 2/10g x 16mm
SELF-DRILLING SCREWS

PANEL RAIL

B
1:4

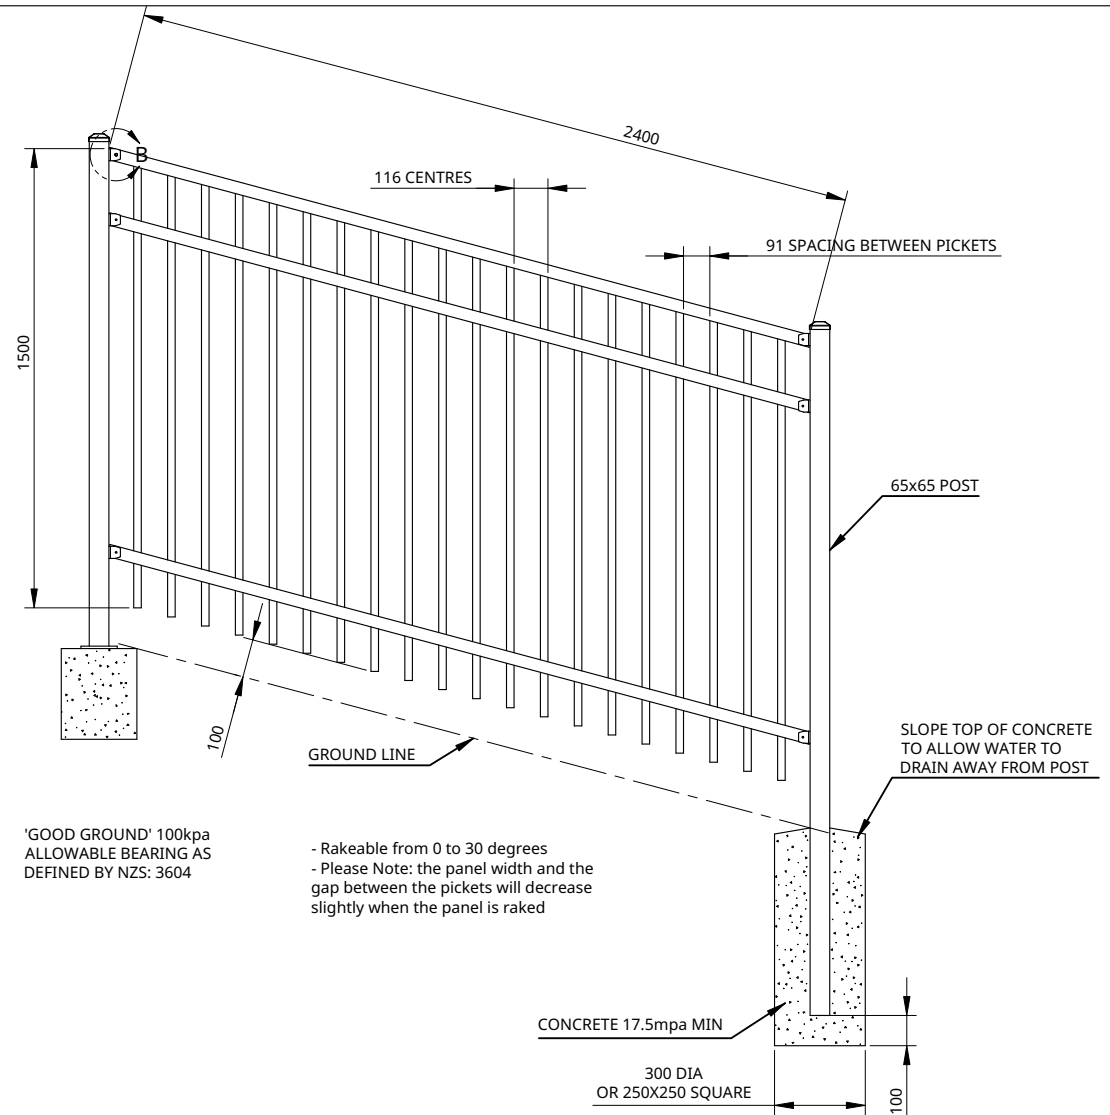

'GOOD GROUND' 100kpa
ALLOWABLE BEARING AS
DEFINED BY NZS: 3604

- Rakeable from 0 to 30 degrees
- Please Note: the panel width and the
gap between the pickets will decrease
slightly when the panel is raked

CONCRETE 17.5mpa MIN

300 DIA
OR 250X250 SQUARE

Boundaryline

Terranota Ltd. P.O. Box 1703 Invercargill 1703
Telephone: 0800 003 006
Fax: 03 215 8248
Email: enquiries@boundaryline.co.nz
Website: www.boundaryline.co.nz

© Copyright June 2017. All rights reserved to Terranota Ltd.

SIZE A4	DATE ISSUED 2023-03-31	REV.	DO NOT SCALE DRAWING
-------------------	----------------------------------	------	-------------------------

SCALE 1:25	SHEET 1 of 1	WEIGHT
----------------------	------------------------	--------

Model

**SentryPanel School Panel 1500mm
Raking Panel**

For use on Swimming Pools, External Balconies or
Retaining Walls, please refer to our Producer Statments
for further specifications.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

Rail Profile	40x40 Square Aluminium with R3 radius on corners	Bracket Fixing	External Aluminium Bracket (adjustable brackets available for angled corners)
Picket Profile	25x25 Square Aluminium with R3 radius on corners	Post Caps	External Aluminium Caps (Standard) or Internal Plastic Caps (Optional)
Panel Length	2400mm x 1500mm		
Flanged Post	65x65x1600mm (125mm Square flange) M12 fixings		
In-ground Post	65x65x2100mm		