




Product Specification Sheet

PicketPanel Rondo

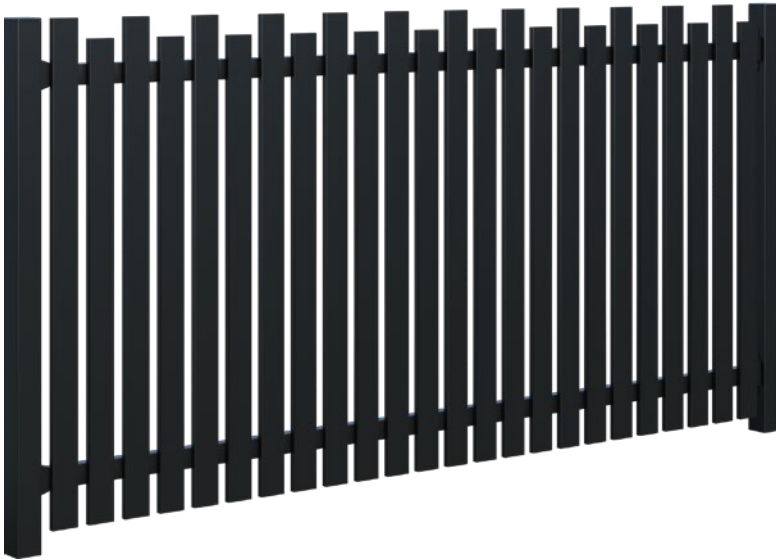

Fence Panel

Panel Height	950 / 1200 / 1500 / 1800mm
Panel Length	2430mm
Picket Size	70x16mm
Picket Spacing	30mm
Rail Size	50x32mm
Rake	Max 35°
Post Size	65x65mm
Post Centres	2507mm



Width and spacings will reduce as degree of rake increases.

Standard Colours



Black



Frost

Description

Architectural depth, enduring style. PicketPanel Rondo is the aluminium alternative to traditional timber picket fencing. Designed with timeless appeal to complement both traditional and contemporary homes, Rondo features 70mm pickets with 30mm spacings and a 50mm height variation between pickets for added depth and character, creating an architecturally refined appearance that maintains privacy without compromising style.

Material

- Powder Coated Aluminium

Features

- Traditional picket fence design
- 30% permeability
- Alternating picket heights
- Wide pickets for enhanced privacy
- Constructed from robust aluminium with a powder coat finish for extra durability
- Modular components for quick and simple installation
- Designed with built in raking up to 35°
- Custom fence and gate solutions available

Applications

- Residential
- Pools
- Medium Density Residential
- Commercial
- Parks and Playgrounds
- Schools and Education Centres
- Care Homes
- Balustrades

Compliance Information

- **F4** (Safety From Falling) compliant when installed as per PS1
- **F9** (Restricting Access to Residential Pools) compliant when installed as per PS1
- Generic PS1 available for download
- Site Specific PS1 available on request

Refer to PS1 when installing in any F4 or F9 situations

Product Specification Sheet

PicketPanel Rondo

Care and Maintenance

When installing in-ground posts, slope concrete away from posts to limit water pooling around posts.

Avoid earth and soil coming into contact or building up against fence, and limit contact to fertilisers and garden chemicals.

Wash down regularly with soft brush and mild detergent solution. Avoid using harsh abrasive products.

Angle grinders should not be used to cut fencing.


Ensure gate tracks and rack are clear of debris and buildup.

Warranty

5 years (not within 0.5km of ocean or 1.5m from salt water pool)

Rondo Gates

Stocked and typical gate widths and heights shown.
Any gate size can be custom fabricated to fit any required dimensions



Adjustable Pedestrian Gates

Gate Height	950 / 1200 / 1500 / 1800mm
Gate Width	Up to 1180mm
Stile Size	50x75mm
Top Rail	50x32mm
Bottom Rail	50x32mm



Driveway Gates


Gate Height	950 / 1200 / 1500 / 1800mm
Gate Width	Manufactured to requirements
Stile Size	50x75mm
Top Rail	50x32mm
Bottom Rail	50x32mm



Sliding Gates

Gate Height	950 / 1200 / 1500 / 1800mm
Gate Width	Manufactured to requirements
Stile Size	50x75mm
Top Rail	50x32mm
Bottom Rail	50x100mm

Bracket Fixing Detail

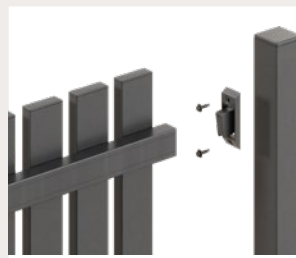


Top Fixing



Bottom Fixing


Brackets



Brackets


Type	PicketPanel Bracket
Size	50x32mm
Fixings	Tek Screw 12g-14x25mm
Finish	Powder coated aluminium

Posts




In-ground Posts

Size	50x50mm / 65x65mm
Length	1800/1900/2100/2200/2500mm
Finish	Powder coated aluminium




Flanged Posts

Size	50x50mm / 65x65mm
Flange	125x125mm
Length	1300/1600/1900mm
Finish	Powder coated aluminium



External Fit Post Caps

Type	Aluminium pyramid cap
Size	50x50mm / 65x65mm
Finish	Powder coated aluminium



Internal Fit Post Caps

Type	Plastic flat caps
Size	50x50mm / 65x65mm
Finish	Plastic



To view all technical documents scan the QR code or visit <https://www.boundaryline.co.nz/technical-support>