




Product Specification Sheet

DuraPanel Vecta

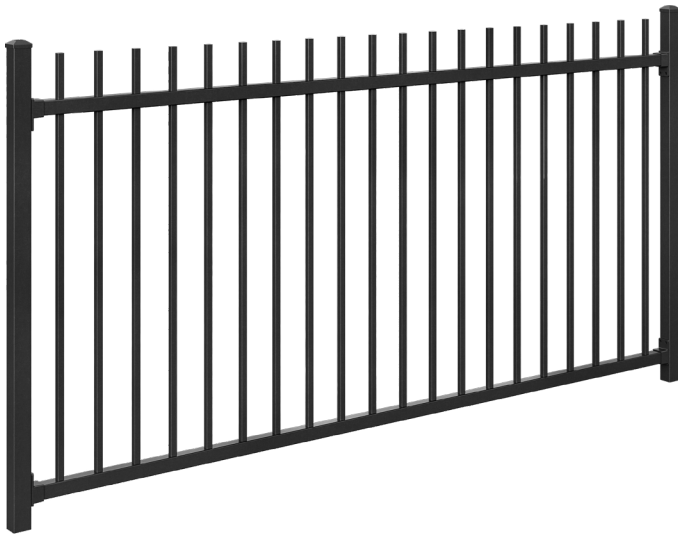

Fence Panel

Panel Height	1200 / 1500mm
Panel Length	2250mm
Verticals Size	19x19mm
Verticals Spacing	95mm
Rail Size	40x40mm
Post Size	50x50mm
Post Centres	2300mm



Raking Fence Panel

Panel Height	1200 / 1500mm
Panel Length	2400mm
Verticals Size	19x19mm
Verticals Spacing	95mm
Rail Size	40x40mm
Rake	Max 35°



Distance between posts and spacings between vertical bars will reduce as degree of rake increases

Standard Colours



Black

Custom powder coat colours available

Description

Versatile and secure. DuraPanel Vecta can be installed with rods up or rods down, offering a flexible design ideal for secure boundary fencing.

Built from strong, welded aluminium, the Vecta panels are tough, durable, and fully compliant with all fence safety regulations.

Material

- Powder coated aluminium

Features

- Features vertical rods that protrude 125mm through the top rail
- Can be installed with the rods pointing up or down
- Square verticals and horizontals for additional strength
- Constructed from robust aluminium with a powder coat finish for extra durability
- Rakeable panel available up to 35°
- Custom fence and gate solutions available

Applications

- Residential
- Pools
- Medium Density Residential
- Commercial
- Parks and Playgrounds
- Schools and Education Centres
- Care Homes
- Balustrades

Compliance Information

- **F4** (*Safety From Falling*) compliant when installed as per PS1
- **F9** (*Restricting Access to Residential Pools*) compliant when installed as per PS1
- Generic PS1 available for download
- Site Specific PS1 available on request

Refer to PS1 when installing in any F4 or F9 situations

Product Specification Sheet

DuraPanel Vecta

Care and Maintenance

When installing in-ground posts, slope concrete away from posts to limit water pooling around posts.

Avoid earth and soil coming into contact or building up against fence, and limit contact with fertilisers and garden chemicals.

Wash down regularly with soft brush and mild detergent solution. Avoid using harsh abrasive products.

Angle grinders should not be used to cut fencing.

Ensure gate tracks and rack are clear of debris and buildup.

Warranty

5 year warranty when installed with these details and regularly maintained (not within 0.5km of ocean, or 1.5m from salt water pools).

Vecta Gates


All gate sizes can be custom fabricated to fit any dimensions
Adjustable pedestrian gates are a set size and are designed to be able to be easily disassembled and adjusted to fit onsite

Adjustable Pedestrian Gates



Gate Height	1200 / 1500mm
Gate Width	Up to 1160mm (<i>adjustable</i>)
Stile Size	50x50mm
Top Rail	40x40mm
Bottom Rail	40x40mm

Pedestrian Swing Gates



Gate Height	1200 / 1500mm
Gate Width	950mm stocked or manufactured to requirements
Stile Size	50x50mm
Top Rail	40x40mm
Bottom Rail	40x40mm

Driveway Swing Gates




Gate Height	1200 / 1500mm
Gate Width	Manufactured to requirements
Stile Size	50x50mm
Top Rail	40x40mm
Bottom Rail	40x40mm

Sliding Gates



Gate Height	1200 / 1500mm
Gate Width	Manufactured to requirements
Stile Size	50x50mm
Top Rail	40x40mm
Bottom Rail	50x100mm


Bracket Fixing Detail

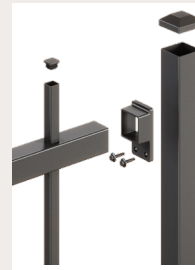

Top Fixing



Bottom Fixing

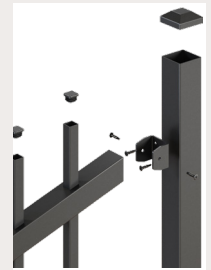

Raking Fixing

Brackets



Brackets


Type	DuraPanel Bracket
Size	40x40mm
Fixings	Tek Screw 12g-14x25mm
Finish	Powder coated aluminium



Raking Brackets


Type	DuraPanel Raking Bracket
Size	40x40mm
Fixings	10g-10x16mm wafer head screw
Finish	Powder coated aluminium

Posts




In-ground Posts

Size	50x50 / 65x65mm
Length	1800/1900/2100/2200/2500mm
Finish	Powder coated aluminium




Flanged Posts

Size	50x50 / 65x65mm
Flange	125x125mm
Length	1300/1600mm
Finish	Powder coated aluminium



External Post Caps

Type	DuraPanel aluminium cap
Size	50x50 / 65x65mm
Finish	Powder coated aluminium



Internal Post Caps

Type	Plastic flat cap
Size	50x50 / 65x65mm
Finish	Plastic



To view all technical documents scan the QR code or visit <https://www.boundaryline.co.nz/technical-support>